

AIR QUALITY MONITOR

S72BY

Instruction Manual



SELENSY

www.selensy.com
Info@selensy.com

PRODUCT DESCRIPTION

This product is a multifunctional air quality monitor that detects Carbon dioxide (CO2), Formaldehyde (HCHO), Total Volatile Organic Compounds (TVOC), Particulate Matter <2.5 micron-sized particles (PM 2.5/1.0/10), Temperature, and humidity with clock, record and WIFI function. As a scientific air quality detection device, it combines multiple air sensor with a built-in fan to allow real-time monitoring Carbon dioxide (CO2), formaldehyde (HCHO), total volatile organic compounds (TVOC), PM2.5/1.0/10, temperature, and humidity on its digital LCD display.

CONSIDERATIONS

Please read the instructions carefully before using this device.
Please let the device work short mins outdoors before use for most accurate results.
Please keep the manual handy for quick reference and troubleshooting.

PRECAUTIONS

Avoid covering the air intake areas during use to avoid inaccurate measurements.
Avoid use of solvents to clean the product as residual fumes will skew air quality readings.
Avoid water or other liquids near the product to avoid electrical damage.
Do not allow unauthorized modification or repair of this product.

Display method: 4.3" LCD Screen display, 480x270 pixels	Atmospheric pressure: 86Kpa - 106Kpa	Detection method for CO2: Infrared (NDIR)
Detection method for PM: Laser Scattering	Sampling time: 1,5 seconds	Product Size: 145x78x97,2 mm
Detection temperature: -10°C to 50°C	Relative humidity: 20% - 85%	Storage temperature: -10°C to 60°C
Concentration unit for CO2:PPM	Homologations CE RoHs	Concentration unit for PM: ug/m3
Concentration unit for HCHO and TVOC: mg/m3	Power source: Lithium battery 3000mAh. 5V DC power charging via USB.	Product weight: 235g

PRODUCT LIST


1x Air Quality monitor

1x Micro USB Charging cable

1x Product Manual

FEATURES


- 4.3" color liquid crystal display (LCD), 480x270 pixels.
- Test variables: Carbon dioxide (CO2), PM2.5/1.0/10, formaldehyde, TVOC, temperature, humidity.
- Large 3000mAh capacity Lithium battery.
- On-board fan to draw in ambient air for more accurate real-time results.
- 5V Micro USB charging.
- Low battery warning.
- Support TUYA WIFI connection.



INSTRUCTIONS

1. STAR UP

When you long-press the center power button, the air quality monitor will boot up. Detector will proceed through its warm-up sequence for about 3 minutes to allow sensors to preheat and fan to draw in fresh ambient air.
This is necessary for accurate results.

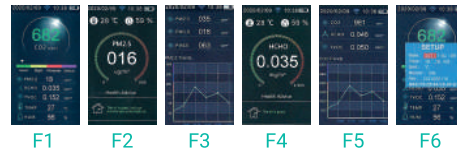

F1 F2 F3 F4 F5 F6


2. KEY FUNCTIONS AND SETTINGS

Power (I/O) / OK/ Menu button, used to confirm highlighted option or to turn device on/off by pressing for 3 seconds.

Down /Switch /Decrease Button, used to scroll between interfaces.

Up/Switch /Increase button, used to scroll between interfaces.

Micro USB charging Port

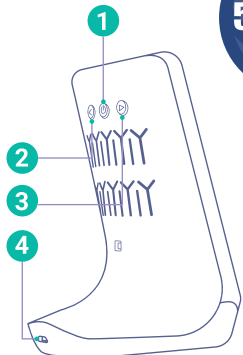

3. SWITCHING AMONG DATA DISPLAY FORMATS(FIGURES 1-5)

Press the up or down buttons to switch among data display formats (figures 1-5) that displays air quality readings in various formats:

4. SETTING (FIGURE 6)

Double Press center I/O button to enter the Time Setting screen. Change the year, month, date, hour, minute, and seconds using up/down button and confirm each change by pressing center I/O button, if will save each setting automatic. It can set Fahrenheit and Celsius. And open/close Alarm.

5. ABOUT CHARGING

When low battery icon is displayed, the device needs to be charged. Insert the included or another compatible micro USB charging cable into the device. Attach the other end to a USB DC charger (such as a smart phone charge r) that outputs DC 5V at >= 1000mA. Full charge for at least 2-3 hours before use. Avoid charging with a USB computer port which only outputs 500 mA.

6. HISTORY (FIGURE 3, FIGURE 5)

Graph shows the last 5 data values for PM2.5, CO2 and taken every 10 minutes over the previous 50 minutes.

7. ALARM THRESHOLD

Default factory value alarm threshold levels for CO2: 1200ppm. When reach 1200ppm, device alarm sounds.

AIR QUALITY STANDARD

Formaldehyde
Less than 0.100:
Safety range
0.101 - 0.200: Slight pollution
0.201-0.300: Moderate pollution
0.301 or more: heavy pollution

TVOC
Less than 0.600:
Safety range
Achieve 0.601 or more: Exceeding the standard can cause respiratory system Abnormal, inflamed, cancerous, etc

PM2.5 AIR QUALITY RATING RANGE

Air quality Level
Excellent
Good
Light pollution
Moderate pollution
Heavy pollution
Serious pollution

PM2.5 (ug/m3) Average Standard
Value
0-35
36-115
76-115
116-150
151-250
more than 250

9. PARAMETERS

CO2 sPECIFICATIONS:
Measuring range:
400-5000PPM
Sensor for CO2: Infrared (NDIR)
Resolution: 1PPM

PM2.5, PM 10, PM 1.0 Specifications:
Measuring principle:
Laser Scattering
Measuring range:
0-999ug/m3
Recollection: 1ug/m3

Formaldehyde Specifications:
Measuring principle:
Electrochemistry
Measurement range:
0.000-1.999mg/m3
Resolution: 0.001mg/m3

TVOC Specifications:
Measuring principle:
Semiconductor
Measuring range:
0.000-9.999mg/m3
Resolution: 0.001mg/m3

Temperature and humidity Specifications:
Measuring range:
-10-50°C
Measurement accuracy:
+1°C
Humidity range: 20% - 85%RH
Measurement accuracy:
+4& RH



Self-calibration
The first time the meter is turned on, it will self-calibrate.

How to connect you device to an Android or Apple IOS smartphone via "Tuya Smart App"

Download and install the "Tuya Smart App" through the Google Play Store or Apple App Store.

Turn on the air quality monitor by long pressing the center mutton.

Connect you phone to a Wifi network and open "Tuya Smart App". Select Add Device, then click the scan icon in the upper right corner of "Tuya" interface (Picture 2), and scan the QR code (Picture 3) to connect and follow the instructions of tuya interface.